


# GBF SentryLink

## Smart Full IP Video Door Station for Multi-Tenant Buildings STK002

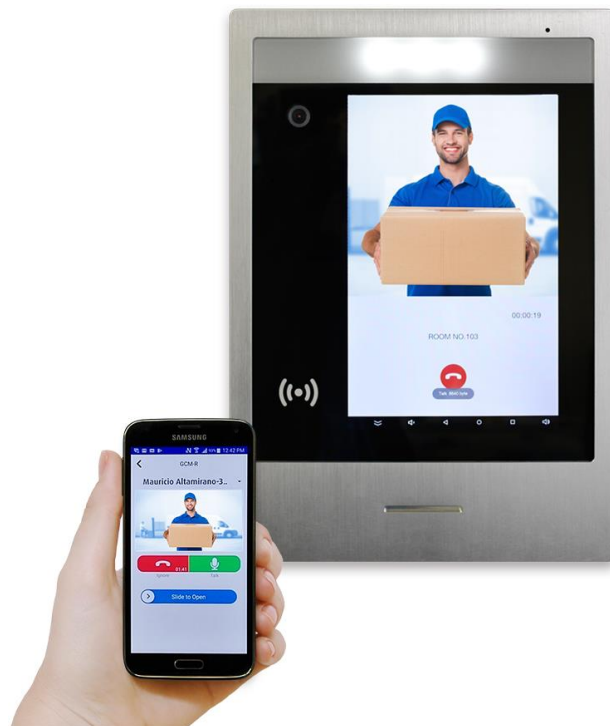

### CUSTOMIZABLE ACCESS

Tenants can create virtual key codes for guests or delivery personnel using the GBF SentryLink App. Virtual key codes can be created with day or hour specific expiration times.

### HIGH QUALITY VIDEO

Integrated dual-stream full-featured 1080P IP camera offers a 120-degree wide viewing angle with no optical distortion, ideal for viewing details at longer distances.

### PREMIUM DESIGN

GBF SentryLink's solid build and clean appearance integrates seamlessly into any building design. Install as a standard surface-mount or flush-mount stand-alone door station, or install it with a contractor-created custom mounting to house the durable touchscreen. Each unit is backed by a 2 year manufacturer's warranty.

### EASY INSTALLATION

The outdoor station requires only a power line, a RJ45 internet cable and a door unlocking wire. No wiring inside each apartment is needed, allowing significant savings on installation labor and costs.

## Smart Access Control for 2-1000 Units Buildings

GBF SentryLink allows you to open and manage two different gates using smart phones, access codes, or RFID key fobs and keycards. Tenants can answer and view callers at your door from any location via a mobile iOS or Android device. 2-way live video and audio monitoring can be initiated from a mobile device even without pressing the bell button at the door station. Tenants can watch live video and snap a picture into their smart phone at anytime from anywhere. All gate activities are recorded into the GBF cloud server where tenants can access log files from their mobile device. Multiple devices can receive call notifications from the IP doorbell intercom at the same time, and multiple doorbells can be accessed together through GBF Sentrylink App. Using GBF's web-browser based PMS (Property Management System), property administrators can edit tenant lists and room information remotely. PMS stores tracking logs, which include time stamp and video snapshots of doorbell, remote unlock, access code/key fob unlock, and virtual key/delivery PIN events, for 7 days.

# GBF SentryLink

## Smart Full IP Video Door Station for Multi-Tenant Buildings STK002

### Technical Specifications

#### System

Operating System Embedded Android 5.1

#### Video

Color Image  
Video Compression H.264  
Image Sensor 1/3" 2MP CMOS  
Lens 3.6mm  
Angle of View D:120° H:90°

#### Audio

Support Dual-way Bidirectional talk  
Audio Compression G.711/AAC  
Audio Input Omnidirectional Mic  
Audio Output Built-in Speaker

#### Display

LCD Screen 10.1" TFT 1024\*600

#### Operation Mode

Reader MIFARE Card

#### Interface

Door Control IO 1

#### Network

Ethernet 10M/100Mbps  
Network Protocol TCP/IP

#### General

Ingress Protection IP65  
Tamper Switch 1  
Installation Surface or flush mounted  
Material Aluminum alloy and Tempered glass  
Power DC 12V  
Power Consumption Standby ≤1W, Work ≤10W  
Working Temp. -20°C~+60°C  
Relative Humidity 10%~90%RH  
Dimensions 10" X 14" X 2.5"  
Package Dimensions 18.5" X 12.5" X 4"  
Weight 5.0Kg

# GBF SentryLink

## Smart Full IP Video Door Station for Multi-Tenant Buildings STK002

### Technical Drawings

